


Integrated Gas Multi-Function Cooktop

MODEL IM15/S



Model IM15/S

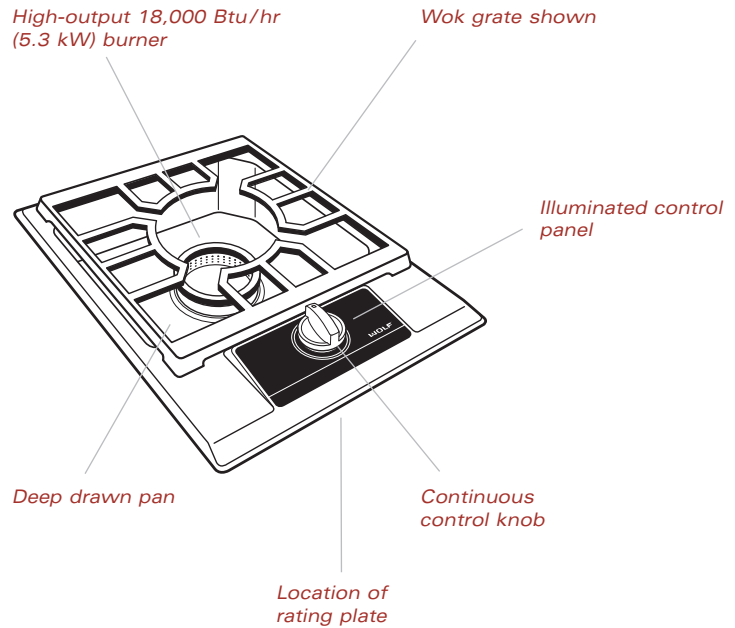

► The Wolf Model IM15/S 15" (381) integrated gas multi-function cooktop is available in natural or LP gas, with classic stainless steel finish. The model number followed by (-LP) denotes an LP gas model.

It's really a misnomer to describe this wonderful cooktop as a wok instrument because it is much more than that. The large, low-profile grate will fit in nicely with any Wolf gas cooktop.

For true wok cooking, the burner sculpts the gas flame into a plume, focusing heat in the center of the wok, then dispersing it outward for precisely controlled cooking. The larger grate will handle your wok perfectly, but also accommodate even your largest stockpots, Dutch ovens and the like. The powerful burner exceeds 18,000 Btu/hr (5.3 kW).

The Wolf gas multi-function cooktop is available in classic stainless steel.

With Wolf's integrated modules, you have the ultimate in customization. You can create your own design by mixing and matching the various components within this system.


Integrated Gas Multi-Function Cooktop

MODEL IM15/S

FEATURES

- ▶ Integrated design allows for installation of multiple cooktops or modules
- ▶ Available in natural and LP gas
- ▶ Stainless steel top construction with classic stainless steel finish
- ▶ High output 18,000 Btu/hr (5.1 kW) dual-stacked sealed burner
- ▶ Automatic electronic reignition system
- ▶ Illuminated control panel
- ▶ Individual spark ignition system
- ▶ Two interchangeable cast iron burner grates with matte porcelain finish—wok grate and low-profile continuous grate
- ▶ Deep drawn burner pan
- ▶ CSA certified for US and Canada
- ▶ Two and five year residential warranty—exclusions apply; warranty information can be found on our website, wolfappliance.com

OVERALL DIMENSIONS ▼

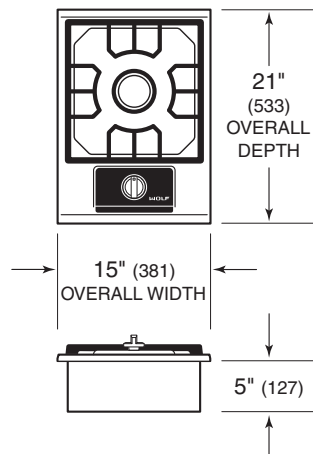

Unit dimensions may vary by $\pm 1/8$ " (3).

Dimensions in parentheses are in millimeters unless otherwise specified.

Integrated Gas Multi-Function Cooktop

MODEL IM15/S



Model IM15/S

MODEL OPTIONS ▼

Classic Stainless Steel IM15/S

Natural gas model listed, for LP gas add (-LP) to the model number.

VENTILATION OPTIONS

- ▶ 30" (762) Cooktop hood or Pro wall or wall chimney hood or liner
- ▶ 30" (762) or 45" (1143) downdraft ventilation system
- ▶ 36" (914) Pro island hood

For additional information, refer to the Cooktop or Pro Ventilation sections of our website, wolfappliance.com.

ACCESSORIES

- ▶ Filler strip
- ▶ Bracket supports for installation of two integrated modules with downdraft (Model DD30 only)
- ▶ High altitude conversion kit

Accessories are available through your Wolf dealer. To obtain local dealer information, visit the Showroom Locator section of our website, wolfappliance.com.

SPECIFICATIONS ▼

Overall Cooktop Width	15" (381)
Overall Cooktop Height	5" (127)
Overall Cooktop Depth	21" (533)
Burner Rating	18,000 Btu/hr (5.1 kW)
Minimum Cabinet Depth	22 ³ / ₄ " (578)
Minimum Height Clearance*	5" (127)
Cooktop Cut-Out Width	14" (356)
Cooktop Cut-Out Depth	19 ¹ / ₄ " (489)
Electrical Supply Requirements	120 V AC, 60 Hz 15 amp circuit
Power Cord	6' (1.8 m) power cord with grounded plug
Gas Rating	18,000 Btu/hr (5.1 kW)
Shipping Weight	30 lbs (14 kg)
Special Note	Cooktop can be installed in combination with other cooktops or modules

**Minimum 5¹/₂" (140) clearance is required between countertop and any combustible surface directly below the cooktop.*

Specifications are subject to change without notice.


Unit dimensions may vary by ± 1/8" (3).

Dimensions in parentheses are in millimeters unless otherwise specified.


Integrated Gas Multi-Function Cooktop

MODEL IM15/S

INSTALLATION SPECIFICATIONS

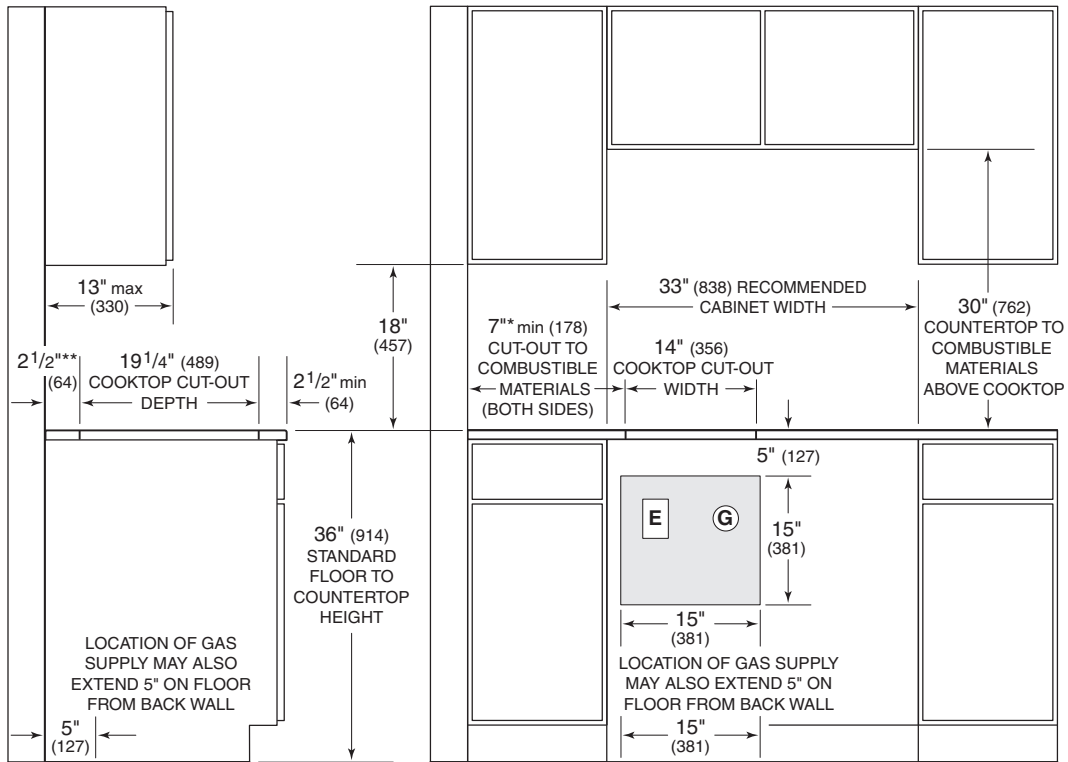

NOTE: Application shown allows for installation of two 15" (381) modules side-by-side with 33" (838) recommended cabinet width. 18" (457) recommended cabinet width for installation of single 15" (381) cooktop or module. *Minimum clearance from both side edges of cooktop cut-out to combustible materials up to 18" (457) above countertop. **Minimum clearance from rear edge of cooktop cut-out to combustible materials up to 18" (457) above countertop.

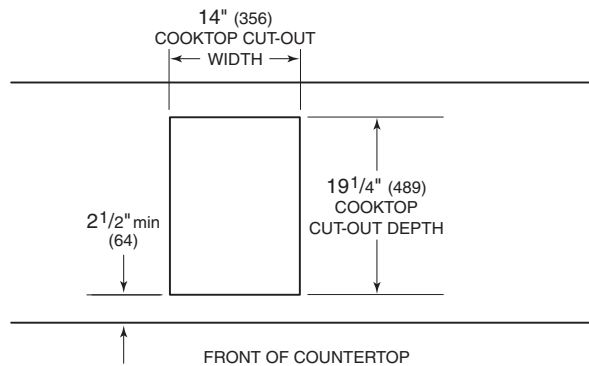

DIMENSIONS

Minimum Cabinet Depth	22 ³ / ₄ " (578)
Cooktop Cut-Out Width	14" (356)
Cooktop Cut-Out Depth	19 ¹ / ₄ " (489)
Location of Electrical and Gas Supply	Within shaded area

See Installation Instructions shipped with unit for detailed specifications.

Integrated Gas Multi-Function Cooktop

MODEL IM15/S

INSTALLATION NOTES

▶ Refer to the illustrations and specifications for overall dimensions, cut-out dimensions and installation specifics.

▶ Wolf recommends using 33" (838) wide cabinets for installation of two integrated modules side by side. An 18" (457) wide cabinet is recommended for installation of a single integrated cooktop module.

IMPORTANT NOTE: Review specific installation instructions for product to product capabilities

▶ When multiple cooktops or modules are installed side by side, refer to the countertop cut-out dimensions on page 6.

▶ A Wolf downdraft system, Cooktop or Pro ventilation hood is recommended. When installing a ventilation hood, refer to the specific requirements of the hood for the minimum dimension to countertop. Also refer to the ventilation recommendation charts in the cooktop or Pro ventilation sections of our website, wolfappliance.com.

▶ The Wolf integrated gas multi-function cooktop requires a separate 120 V AC, 60 Hz power supply. The service should have its own 15 amp circuit breaker and a grounded 3-prong receptacle should be located within the reach of the 6' (1.8 m) power cord. Locate electrical within the shaded area shown in the illustration on page 4.

IMPORTANT NOTE: A ground fault circuit interrupter (GFCI) is not recommended and may cause interruption of operation.

▶ For the integrated multi-function cooktop, the gas service may be supplied through the floor. Refer to the illustration on page 4 for placement of electrical and gas supply.

▶ The Wolf multi-function cooktop is designed to operate on natural gas at 5" (12.5 mb) WC (water column) pressure or LP gas at 10" (25 mb) WC pressure. The minimum line pressure for natural gas is 7" (17.5 mb) WC and 11" (27.4 mb) WC for LP gas. The maximum gas supply pressure to the regulator should never exceed 14" (34.9 mb) WC; .5 psi (3.5 kPa). It is supplied with a 1/2" NPT male gas connection at the right rear bottom corner of the cooktop. The male connector exits the unit straight down and you are supplied with a regulator with two female connectors.

▶ You must follow all National Electrical Code and gas regulations. In addition, be aware of local codes and ordinances when installing your services.

▶ Wolf gas cooktops using natural gas function up to an altitude of 8,000' (2438 m) without any adjustment. Natural gas installations from 8,000' (2438 m) to 10,000' (3048 m) need the high altitude conversion kit. LP gas installations will operate up to 10,000' (3048 m) without adjustment.

▶ Refer to the installation instructions shipped with each Wolf product for detailed specifications.

▲ WARNING

This cooktop is intended for indoor use only.

Integrated Gas Multi-Function Cooktop MODEL IM15/S

MULTIPLE COOKTOP INSTALLATION


With Wolf's integrated modules, you have the ultimate in customization. You can create your own design by mixing and matching the various components within this system. And when you couple these modules with other cooktops within the Wolf inventory you and your client will truly understand freedom of choice.

Some Wolf integrated modules can be installed together or with a 30" (762) or 36" (914) cooktop. When multiple units are installed side by side, the cut-out dimensions that are shown in the illustration are derived by adding 1 1/4" (32) additional space for each additional unit, to give you your total cut-out width. Refer to the illustration below for countertop cut-out dimensions for installation of multiple cooktop units.

When two or more cooktops or modules are installed together, an accessory filler strip is recommended. Refer to Accessories on page 3.

IMPORTANT NOTE: When multiple cooktops and/or modules are installed side by side, each unit must have its own separate recommended electrical circuit. When multiple gas cooktops and/or modules are installed next to one another, they can receive their gas supply from a common line. However, each unit must have its own regulator installed between the mainline and the cooktop or module.

IMPORTANT NOTE: Review specifications for each specific integrated module for installation requirements and limitations. Refer to the integrated modules section of our website, wolfappliance.com.

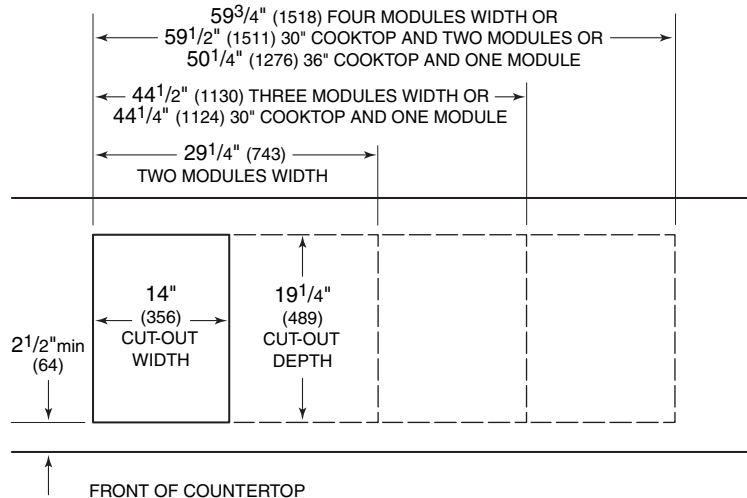

Countertop cut-out dimensions for installation of multiple cooktop units.