

CADET® 6' x 36" WHIRLPOOL AND BATHING POOL

- 2773.018W Whirlpool**
 - Acrylic with fiberglass reinforcement
 - Pre-leveled tub bottom
 - Form-fitted back rest
 - Molded-in armrests with elbow supports
 - Dual accessory deck area
 - Single speed pump/motor
 - Factory installed power cord with plug
 - Eight-jet system featuring:
 - Two multi-directional and flow adjustable Acumax™ high output jets
 - Six multi-directional and flow adjustable Acumax body massage jets including two in the lumbar area
 - Side-mounted air switch On/Off
 - Two silent air volume controls
 - Quick Connect Safe-T-Heater connection system

- 2773.018WC EverClean® Whirlpool:**
 - Same as 2773.018W except with the EverClean System

- 2773.002 Bathing Pool only**

Nominal Dimensions:

1829 x 908 x 502mm
(72" x 35-3/4" x 19-3/4")

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

American Standard whirlpools and air baths with EverClean® incorporate a safe and effective silver-ion antimicrobial additive right into the circulation piping to protect the pipes from mold, mildew, algae and fungus that could cause deterioration or staining of the pipes.

SEE REVERSE FOR PRODUCT DIMENSIONS AND SPECIFICATIONS



Required Components (Specified finish):

- Color:
- Bath Filler
- Universal Bath Drain: 1583.470
- Deep Soak® Bathtub Drain (Bathing Pool only)**: 1640.305



Optional Components:

- Safe-T-Heater*: 9075.120
- 6 Foot Apron: 9272.018 (specify color)
- Universal Tile Bead Kit: 751755-100
- Grab Bar Kit: 9822.200-two per kit (specify finish)

For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

* **NOTE:** the Safe-T-Heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

** **NOTE:** Deep Soak Bath Drain provides an additional 2" of water depth for a more luxurious bath.

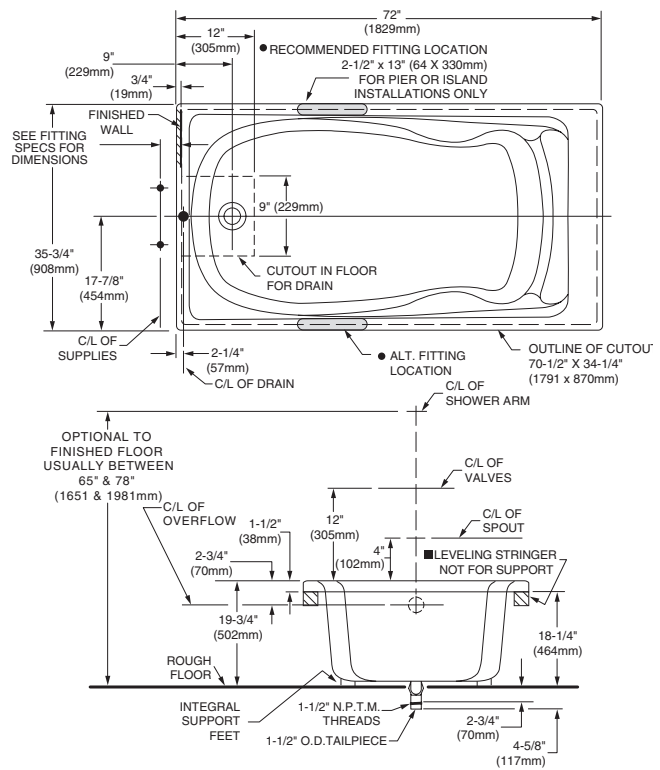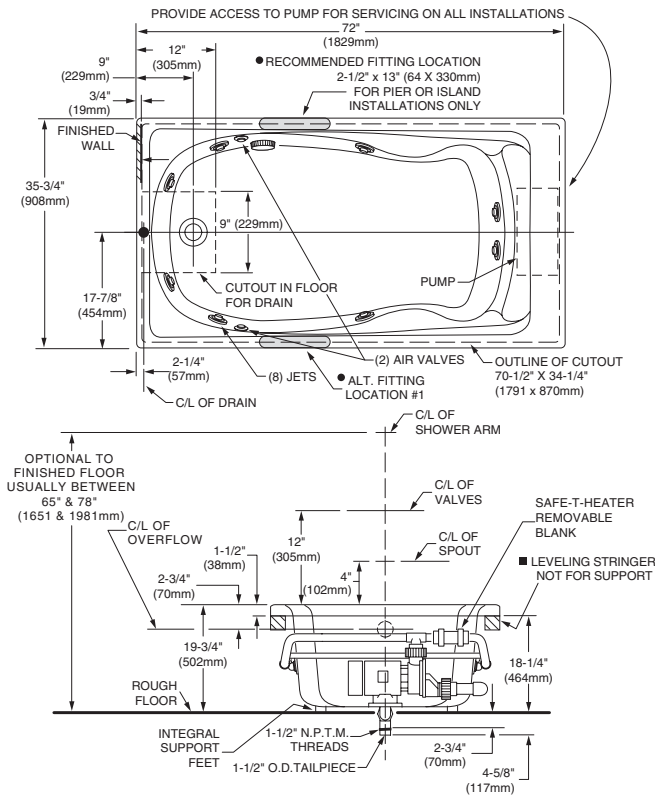

GENERAL SPECIFICATIONS FOR 2773 WHIRLPOOL

INSTALLED SIZE	72 x 35-3/4 x 19-3/4 In. (1829 x 908 x 502mm)
WEIGHT	101 Lbs. (45 Kg.)
WEIGHT w/WATER	751 Lbs. (341 Kg)
GAL. TO OVERFLOW	78 Gal. (296 L.)
MIN. OPERATING GAL.	64 Gal. (243 L.)
BATHING WELL AT SUMP	23 x 49 In. (584 mm x 1245 mm)
BATHING WELL AT RIM	65 x 29 In. (1651 x 737 mm)
WATER DEPTH TO OVERFLOW	13-1/2 In. (343 mm)
FLOOR LOADING (PROJECTED AREA)	40 Lbs./Sq. Ft. (190 Kgs/Sq. m.)
PTS.	23.8
CUBE (FT ³)	48.3

WHIRLPOOL ELECTRICAL SPECIFICATIONS

PUMP	120V., 60 HZ, 15A GFCI
------	------------------------

GENERAL SPECIFICATIONS FOR 2773 BATHING POOL

INSTALLED SIZE	72 x 35-3/4 x 19-3/4 In. (1829mm x 908 mm x 502mm)
WEIGHT	76 Lbs. (34 Kg.)
WEIGHT w/WATER	725 Lbs. (326 Kg.)
GAL. TO OVERFLOW	78 Gal. (296 L.)
BATHING WELL AT SUMP	23 x 49 In. (584 mm x 1245 mm)
BATHING WELL AT RIM	65 x 29 In. (1651 x 737 mm)
WATER DEPTH TO OVERFLOW	13-1/2 In. (343 mm)
FLOOR LOADING (PROJECTED AREA)	38 Lbs./Sq. Ft. (183 Kgs/Sq. m.)
PTS.	23.8
CUBE (FT ³)	48.3

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIAL BY OTHERS.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.

OPTIONAL 3 WALL TILING BEAD. KIT AND APRON NO. 9272.018 AVAILABLE AND MUST BE ORDERED SEPARATELY.

● FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

● IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH CIRCULATING SYSTEM PIPING, DRAIN OVERFLOW, AND APRON INSTALLATION. MOUNTING HOLES DRILLED BY INSTALLER.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.