

CADET™ 5' X 32'' WHIRLPOOL & BATHING POOL

2770.018W Whirlpool featuring System I

- Acrylic with fiberglass reinforcement
- Pre-leveled tub bottom
- Form-fitted backrest position
- Dual, molded in arm rests
- 1.0 HP single speed, self-draining pump/motor
- Factory installed power cord with plug
- Eight multi-directional and flow-adjustable jets including:
 - Two foot jets
 - Four body massage jets
 - Two recessed back-rest jets
- Deck-mounted air switch On/Off
- Two silent air volume controls
- Factory installed and tested whirlpool system

2770.018WC Stay Clean™ Whirlpool Massage Featuring System I:

- Same as 2770.018W except with the StayClean™ whirlpool system featuring Antimicrobial AlphaSan®

2770.002 Bathing Pool only

Nominal Dimensions: 1521 x 806 x 502mm
(59-7/8" x 31-3/4" x 19-3/4")

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density



To Be Specified - Required:



- Color:
- Bath Filler: (specify finish)
- Bath Drain: 1583.470 (specify finish)

To Be Specified - Optional:

- 5 Foot Acrylic Apron: 9360.018 (specify color)
- 5 Foot Apron: 9260.018 (specify color)
- Bath Caddie: 9533.100 (in Chrome only)
- Jet Trim Ring Kit: 9860.200-two per kit (Specify finish)
- Universal Tile Bead Kit: 751755-100
- Grab Bar Kit: 9822.200-two per kit (specify finish)

For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

NOTE: Roughing-in dimensions and product specifications shown on reverse side of page.

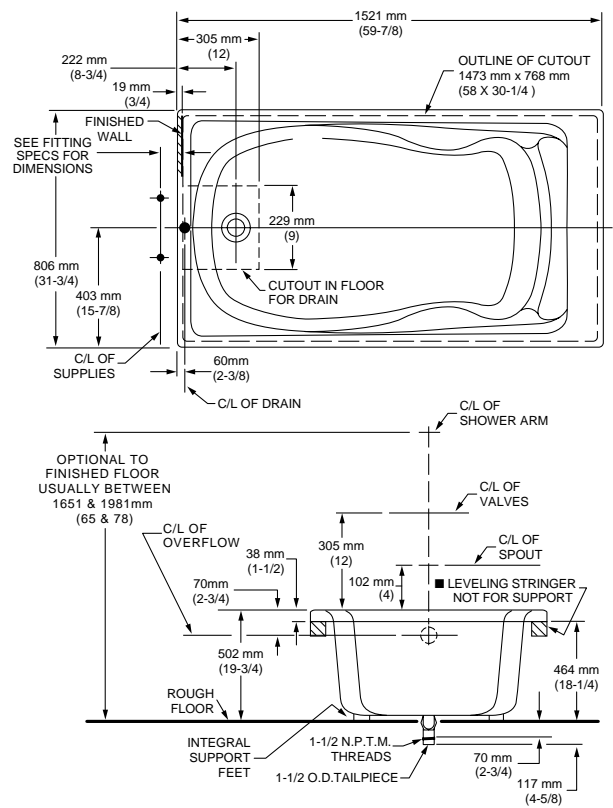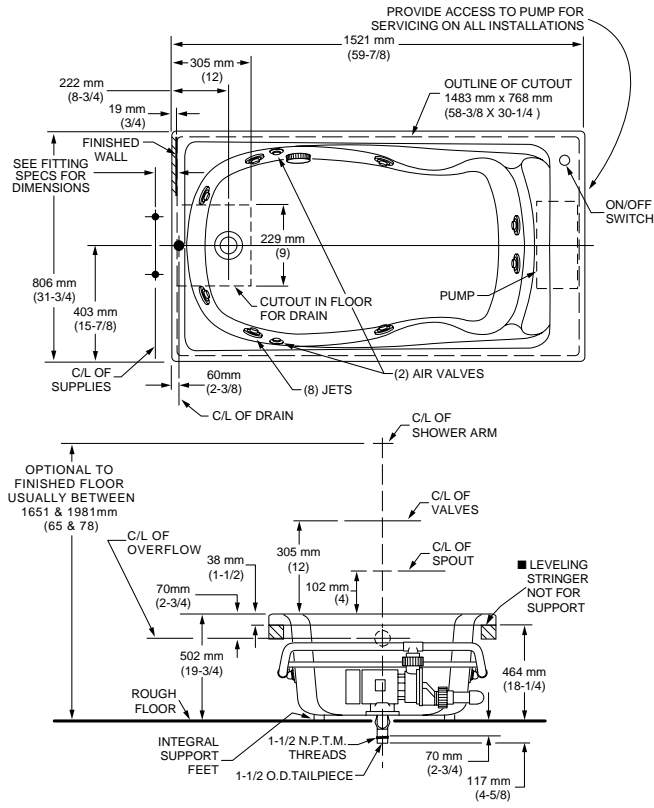

GENERAL SPECIFICATIONS FOR 2770 WHIRLPOOL

INSTALLED SIZE	59-7/8 x 31-3/4 x 19-3/4 In. (1521 x 806 x 502mm)
WEIGHT	85 Lbs. (39 Kg.)
WEIGHT w/WATER	535 Lbs. (243 Kg.)
GAL. TO OVERFLOW	54 Gal. (204 L.)
MIN. OPERATING GAL.	49 Gal. (186 L.)
BATHING WELL AT SUMP	20 x 40 In. (508mm x 1016mm)
BATHING WELL AT RIM	53-1/2 x 26 In. (1359mm x 699mm)
WATER DEPTH TO OVERFLOW	14 In. (356mm)
FLOOR LOADING (PROJECTED AREA)	41 Lbs./Sq. Ft. (197 Kgs/Sq. m.)
PTS.	15.6
CUBE (FT ³)	29.6

WHIRLPOOL ELECTRICAL SPECIFICATIONS

SYSTEM I PUMP _____ 1.1 HP, 9.9 AMPS, 120V.

GENERAL SPECIFICATIONS FOR 2770 BATHING POOL

INSTALLED SIZE	59-7/8 x 31-3/4 x 19-3/4 In. (1521 mm x 806 mm x 502mm)
WEIGHT	62 Lbs. (28 Kg.)
WEIGHT w/WATER	512 Lbs. (233 Kg.)
GAL. TO OVERFLOW	54 Gal. (204 L.)
BATHING WELL AT SUMP	20 x 40 In. (508mm x 1016mm)
BATHING WELL AT RIM	53-1/2 x 26 In. (1359mm x 699mm)
WATER DEPTH TO OVERFLOW	14 In. (356mm)
FLOOR LOADING (PROJECTED AREA)	39 Lbs./Sq. Ft. (189 Kgs/Sq. m.)
PTS.	15.6
CUBE (FT ³)	29.6

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIAL BY OTHERS.

- REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.

OPTIONAL 3 WALL TILING BEAD. KIT AND APRON No. 9260.018 or 9360.018 AVAILABLE AND MUST BE ORDERED SEPARATELY.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT:

Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.