



UNDER COUNTER MICROWAVE OVEN WITH DRAWER DESIGN

JMD2124W – 23<sup>3</sup>/<sub>4</sub>" x 15<sup>3</sup>/<sub>8</sub>" x 24<sup>1</sup>/<sub>2</sub>"


PRODUCT DIMENSIONS

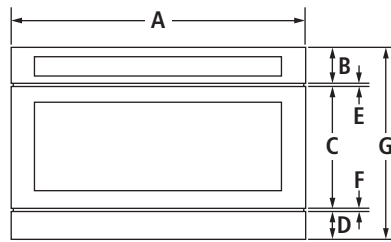

FRONT VIEW

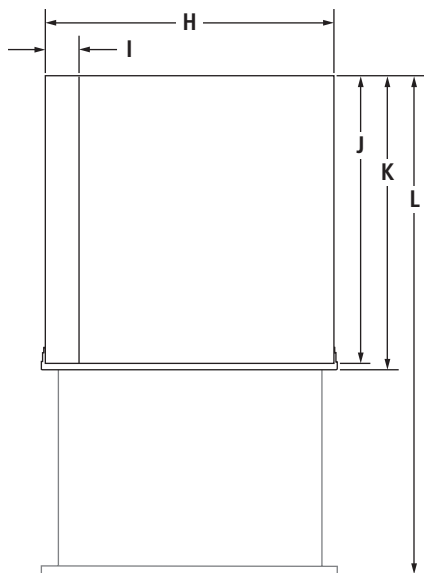

TOP VIEW

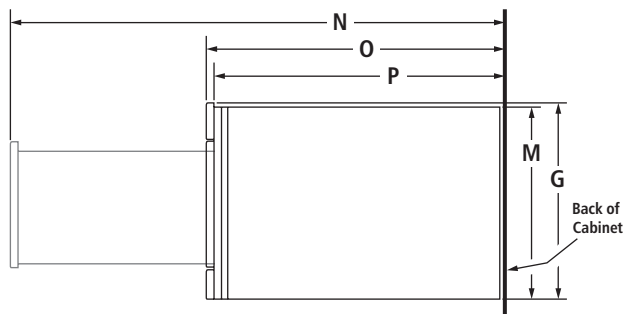


SIDE VIEW

MODEL #		JMD2124W	
		in	cm
<b>A</b>	Overall width	23 <sup>3</sup> / <sub>4</sub>	60.4
<b>B</b>	Height of control panel	2 <sup>1</sup> / <sub>2</sub>	6.2
<b>C</b>	Height of drawer	10 <sup>1</sup> / <sub>2</sub>	26.6
<b>D</b>	Height of trim	2	5.1
<b>E</b>	Space between control panel and drawer	<sup>1</sup> / <sub>8</sub>	0.4
<b>F</b>	Space between drawer and trim	<sup>1</sup> / <sub>4</sub>	0.5
<b>G</b>	Overall height	15 <sup>3</sup> / <sub>8</sub>	39.1
<b>H</b>	Recessed width	21 <sup>5</sup> / <sub>8</sub>	54.9
<b>I</b>	Width of conduit channel	4 <sup>5</sup> / <sub>8</sub>	11.9
<b>J</b>	Depth without drawer	23 <sup>1</sup> / <sub>2</sub>	59.7
<b>K</b>	Depth with drawer	24 <sup>1</sup> / <sub>2</sub>	62.4
<b>L</b>	Depth with drawer fully open	39 <sup>1</sup> / <sub>2</sub>	100.5
<b>M</b>	Recessed height	14 <sup>5</sup> / <sub>8</sub>	37.1
<b>N</b>	Depth with drawer fully open Flush receptacle	39 <sup>1</sup> / <sub>2</sub>	100.5
	Non-flush receptacle	44	111.9
<b>O</b>	Depth with drawer Flush receptacle	24 <sup>1</sup> / <sub>2</sub>	62.4
	Non-flush receptacle	29	73.8
<b>P</b>	Depth without drawer Flush receptacle	23 <sup>1</sup> / <sub>2</sub>	59.7
	Non-flush receptacle	28	71.1

UNDER COUNTER MICROWAVE OVEN WITH DRAWER DESIGN

JMD2124W – 23¾" x 15⅜" x 24½"

OPENING/CLEARANCE DIMENSIONS

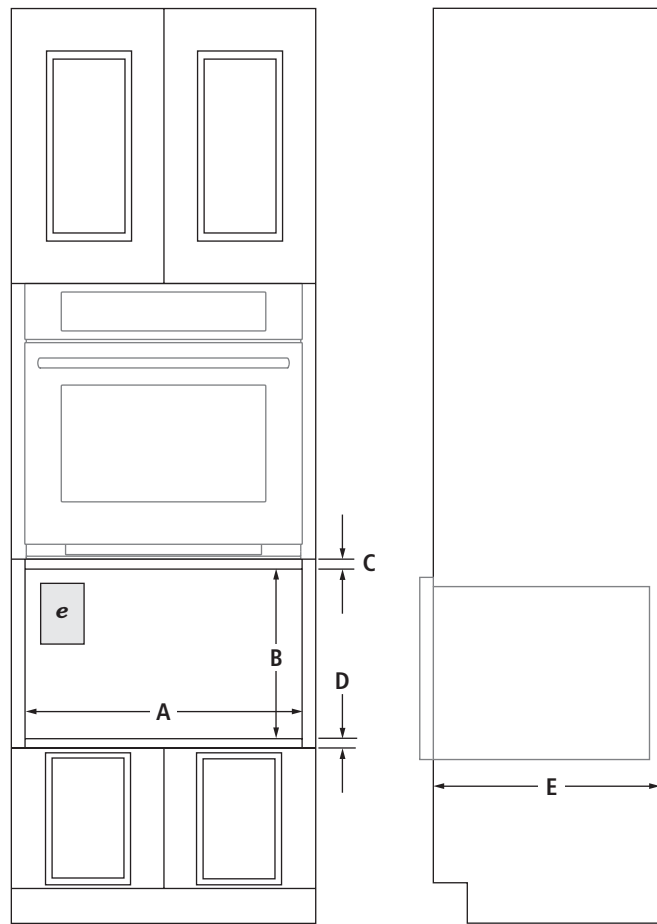

FRONT VIEW – INSTALLATION UNDER SINGLE OVEN

SIDE VIEW


MODEL #		JMD2124W	
		in	cm
<b>A</b>	Width of cutout	22⅛	56.2
<b>B</b>	Height of cutout	14⅞	37.6
<b>C</b>	Top of cutout to bottom of oven (min.)	2	5.1
	Top of cutout to bottom of countertop (min.)	2	5.1
<b>D</b>	Bottom of cutout to top of cabinet door (min.)	2	5.1
<b>E</b>	Depth of cutout (min.) with flush receptacle	23½	59.7
	with non-flush receptacle	28	71.1
<b>e</b>	Recommended electrical connection location		

**ELECTRICAL REQUIREMENTS**


120 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded circuit is required. A time-delay fuse or dedicated circuit is recommended. Do not use an extension cord.

**LOCATION REQUIREMENTS**

Support structure must be able to support 100 lb (45.4 kg) including microwave oven and contents.

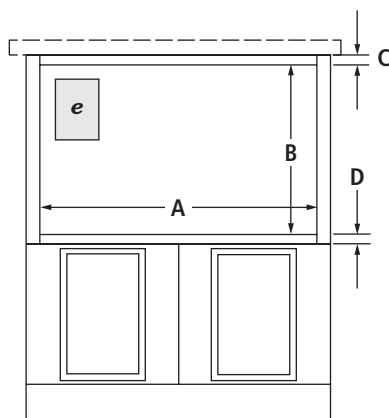

FRONT VIEW – INSTALLATION UNDER COUNTERTOP



BACK VIEW