


Siena is packed with power. With a 650-CFM blower and ACT™ technology this is a hood with a versatile range of features perfect for any kitchen. With updated dual-level BriteStrip™ LED lighting, a recirculating option

and Zephyr's ICON Touch® controls, clearing the air is as simple as the touch of a button.


ACT™

| Min. - Max. CFM   | INTERNAL BLOWER STANDARD | INTERNAL BLOWER with ACT™ AIRFLOW CONTROL TECHNOLOGY™* |           |
|-------------------|--------------------------|--|-----------|
|                   | 200 - 650                | 200 - 390  | 200 - 290 |
| Min. - Max. Sones | 1 - 6                    | 1 - 4  | 1 - 3     |


\*AIRFLOW CONTROL TECHNOLOGY™ (ACT™) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.

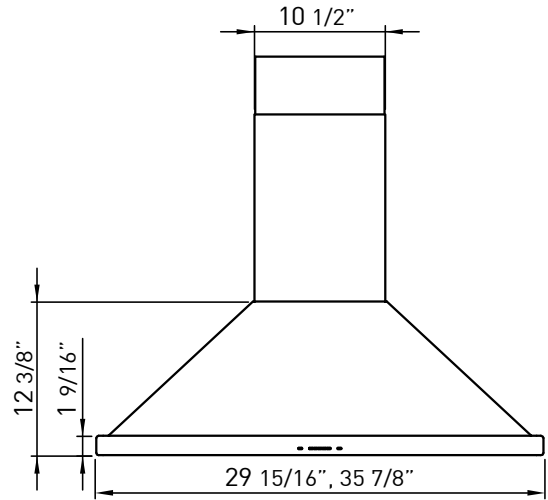

FRONT

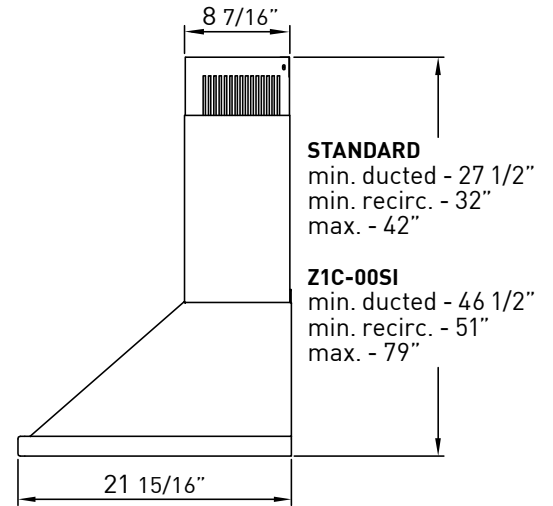

SIDE

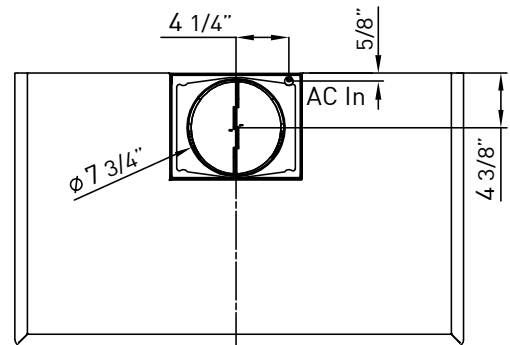

C/L

TOP

| MODEL                              | ZSI-E30BS                   | ZSI-E36BS                   |
|------------------------------------|-----------------------------|-----------------------------|
| Stainless Steel                    |                             |                             |
| <b>Size</b>                        | 30"                         | 36"                         |
| <b>Blower CFM (Min. - Max.)</b>    | 200 - 650                   | 200 - 650                   |
| <b>Sones (Min. - Max.)</b>         | 1 - 6                       | 1 - 6                       |
| <b>ACT 390 CFM (Min. - Max.)</b>   | 200 - 390                   | 200 - 390                   |
| <b>ACT 390 Sones (Min. - Max.)</b> | 1 - 4                       | 1 - 4                       |
| <b>ACT 290 CFM (Min. - Max.)</b>   | 200 - 290                   | 200 - 290                   |
| <b>ACT 290 Sones (Min. - Max.)</b> | 1 - 3                       | 1 - 3                       |
| <b>FEATURES</b>                    |                             |                             |
| <b>ACT™ Technology</b>             | Yes                         | Yes                         |
| <b>Controls</b>                    | ICON Touch®                 | ICON Touch®                 |
| <b>Speed Levels</b>                | 5*                          | 5*                          |
| <b>Auto Delay-Off</b>              | Yes                         | Yes                         |
| <b>Lighting</b>                    | BriteStrip™ LED, x1         | BriteStrip™ LED, x1         |
| <b>Dual-Level Lighting</b>         | Yes                         | Yes                         |
| <b>Filters</b>                     | Hybrid Baffle x2            | Hybrid Baffle x2            |
| <b>Recirculating Option</b>        | Yes                         | Yes                         |
| <b>Extension Duct Cover Option</b> | Yes, Up to 12' Ceiling      | Yes, Up to 12' Ceiling      |
| <b>DUCT SPECIFICATIONS</b>         |                             |                             |
| <b>Vertical Internal Blower</b>    | 8" Round                    | 8" Round                    |
| <b>Horizontal Internal Blower</b>  | NA                          | NA                          |
| <b>AC POWER</b>                    | 120V, 60Hz at Max. 4A       | 120V, 60Hz at Max. 4A       |
| <b>OPTIONAL ACCESSORIES</b>        |                             |                             |
| <b>Recirculating Kit</b>           | ZRC-00SI                    | ZRC-00SI                    |
| <b>Extension Duct Cover</b>        | Z1C-00SI                    | Z1C-00SI                    |
| <b>Make-Up Air Kit</b>             | MUA008A                     | MUA008A                     |
| <b>MOUNTING HEIGHT RANGE**</b>     | 26" - 34"                   | 26" - 34"                   |
| <b>WARRANTY</b>                    | 3 years parts, 1 year labor | 3 years parts, 1 year labor |

| CEILING HEIGHT       |                          | 8'          | 8.5'      | 9'        | 9.5'        | 10'       | 10.5'     | 11'       | 12'       |
|----------------------|--------------------------|-------------|-----------|-----------|-------------|-----------|-----------|-----------|-----------|
| STANDARD DUCT COVER  | Ducted Mounting Height** | 26" - 32.5" | 26" - 34" | 30" - 34" | NA          | NA        | NA        | NA        | NA        |
|                      | Recirc Mounting Height** | 26" - 28"   | 26" - 34" | 30" - 34" | NA          | NA        | NA        | NA        | NA        |
| EXTENSION DUCT COVER | Ducted Mounting Height** | NA          | NA        | NA        | 26" - 31.5" | 26" - 34" | 26" - 34" | 26" - 34" | 28" - 34" |
|                      | Recirc Mounting Height** | NA          | NA        | NA        | 26" - 27"   | 26" - 34" | 26" - 34" | 26" - 34" | 28" - 34" |

\*When ACT™ is enabled the maximum speed levels will change. ACT 390 CFM = 4 speeds and ACT 290 CFM = 3 speeds.  
 \*\*Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.

**ACT™** AIRFLOW CONTROL TECHNOLOGY™ (ACT™) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.

Specifications subject to change, check zephyronline.com for up-to-date information.  
 Zephyr Ventilation | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.880.VENT

JAN17.0101

