



**PRODUCT MODEL NUMBERS**

ASI2275FR  
ASI2575FR

**Electrical:** A 115-volt, 60 Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

**Water:** A cold water supply with water pressure of between 30 and 120 psi (207 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.


**Reverse Osmosis Water Supply:**

**IMPORTANT:** The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

**Side by Side Refrigerator**

**PRODUCT DIMENSIONS**

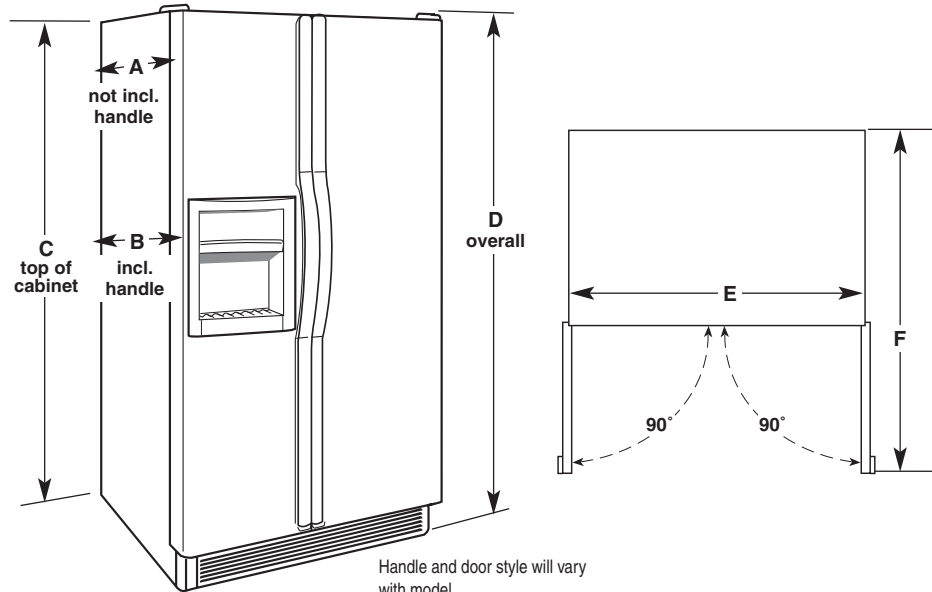


Handle and door style will vary with model.

Dimensions "C" and "D" include rollers extended 3/4" (1.9 cm).

Model	Model Size	Depth without Handle "A"	Depth with Handle "B"	Cabinet Height "C"	Overall Height "D"	Cabinet Width "E"	Depth "F" with Doors Open 90°
ASI2275FR	21.2	32 <sup>3</sup> / <sub>8</sub> " (82.2 cm)	34 <sup>5</sup> / <sub>8</sub> " (87.9 cm)	65 <sup>7</sup> / <sub>8</sub> " (167.3 cm)	66 <sup>1</sup> / <sub>4</sub> " (168.3 cm)	32 <sup>3</sup> / <sub>4</sub> " (83.2 cm)	49 <sup>7</sup> / <sub>8</sub> " (126.7 cm)
ASI2575FR	24.5	32 <sup>3</sup> / <sub>8</sub> " (82.2 cm)	34 <sup>5</sup> / <sub>8</sub> " (87.9 cm)	68 <sup>7</sup> / <sub>8</sub> " (174.9 cm)	69 <sup>1</sup> / <sub>8</sub> " (175.6 cm)	35 <sup>1</sup> / <sub>2</sub> " (90.2 cm)	49 <sup>7</sup> / <sub>8</sub> " (126.7 cm)

**LOCATION REQUIREMENTS**

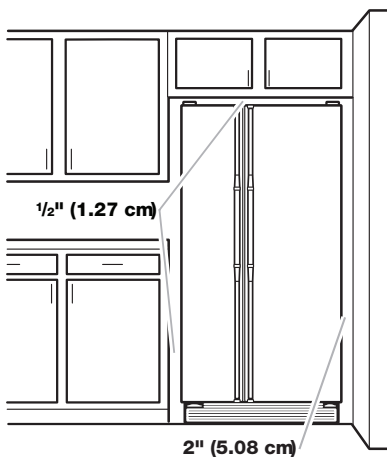

**IMPORTANT:** This refrigerator is designed for indoor household use only.

To ensure proper ventilation for your refrigerator, allow for 1/2" (1.27 cm) of space on each side and at the top. Allow for 2" (5.08 cm) of space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave a 2" (5.08 cm) minimum space on each side (depending on your model) to allow the doors to swing open.

**NOTES:**

- This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.
- Normal minimum cabinet cut-out width required for product installation is 36" (91.44 cm). However, if the product is placed against an extended wall and the ability to remove the crisper pans is desired, an additional 18" (45.72 cm) of cabinet width is required, so a total cabinet opening width of 54" (137.16 cm) is recommended.